


# ULTEM™ 9085 Resin

Production-Grade Thermoplastic  
for Fortus 3D Production Systems

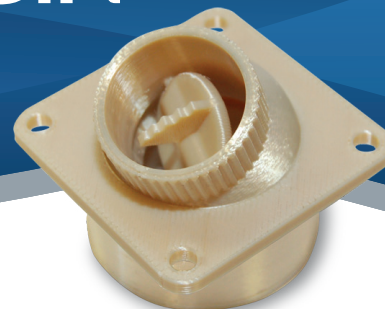

ULTEM™ 9085 resin is a flame-retardant high-performance thermoplastic for digital manufacturing and rapid prototyping. It is ideal for the transportation industry due to its high strength-to-weight ratio and its FST (flame, smoke and toxicity) rating. This unique material's preexisting certifications make it an excellent choice for the commercial transportation industry – especially aerospace, marine and ground vehicles. Combined with a Fortus® 3D Production System, ULTEM 9085 allows design and manufacturing engineers to produce fully functional parts that are ideal for advanced functional prototypes or end use without the cost or lead time of traditional tooling.

Mechanical Properties <sup>1</sup>	Test Method	English	Metric
Tensile Strength (Type 1, 0.125", 0.2"/min)	ASTM D638	10,400 psi	71.6 MPa
Tensile Modulus (Type 1, 0.125", 0.2"/min)	ASTM D638	322,000 psi	2,200 MPa
Tensile Elongation (Type 1, 0.125", 0.2"/min)	ASTM D638	6%	6%
Flexural Strength (Method 1, 0.05"/min)	ASTM D790	16,700 psi	115.1 MPa
Flexural Modulus (Method 1, 0.05"/min)	ASTM D790	362,600 psi	2,500 MPa
IZOD Impact, notched (Method A, 23°C)	ASTM D256	2.0 ft-lb f/in	106 J/m
IZOD Impact, un-notched (Method A, 23°C)	ASTM D256	11.5 ft-lb f/in	613.8 J/m
Compression Strength	ASTM D695	15,200 psi	104 MPa
Compression Modulus	ASTM D732	280,000 psi	1,930 MPa
Shear Strength (0.25" thick coupon)	ASTM D732	8,300 psi	57 MPa

Thermal Properties <sup>2</sup>	Test Method	English	Metric
Heat Deflection (HDT) @ 66 psi, 0.125" unannealed	-----	-----	-----
Heat Deflection (HDT) @ 264 psi, 0.125" unannealed	ASTM D648	307 °F	153°C
Glass Transition Temperature (Tg)	DSC (SSYS)	367°F	186°C
Coefficient of Thermal Expansion	ASTM E228	3.67 <sup>-05</sup> in/(in·F°)	65.27 µm/(m·C°)
Melting Point	-----	Not Applicable <sup>3</sup>	Not Applicable <sup>3</sup>

Electrical Properties <sup>4</sup>	Test Method	Value Range
Volume Resistivity	ASTM D257	4.9 <sup>15</sup> - 8.2 <sup>15</sup> ohms-cm
Dielectric Constant	ASTM D150-98	3.2 - 3.0
Dissipation Factor	ASTM D150-98	.0027 - .0026
Dielectric Strength	ASTM D149-09, Method A	290 - 110 V/mil

# ULTEM™ 9085 Resin



Other <sup>2</sup>	Test Method	Value	
Specific Gravity	ASTM D792	1.34	
Rockwell Hardness	ASTM D785	---	
Flame Classification	UL94	V-0	
Oxygen Index	ASTM D2863	0.49	
Vertical Burn	FAR 25.853 (Test a (60s), passes at)	2 seconds	
FAA Flammability	FAR 25.853 (Method A/B)	< 5	
OSU Total Heat Release (5 min test)	FAR 25.853	36 kW/m <sup>2</sup>	
OSU Total Heat Release (2 min test)	FAR 25.853	16 kW min/m <sup>2</sup>	
UL File Number	-----	E345258	
Outgassing			
Total Mass Loss (TML)	ASTM E595	0.41% (1.00% maximum)	
Collected Volatile Condensable Material (CVCM)	ASTM E595	-0.1% (0.10% maximum)	
Water Vapor Recovered (WVR)	ASTM E595	-0.37% (report)	
Fungus Resistance (Method 508.6)	MIL-STD-810G	Passed	
Burn Testing			
Vertical Burn (60 sec)	FAR 25.853	Passed (0.040" - 0.250" thick)	
Heat Release 65/65	FAR 25.853	Passed (<40HR Peak, 0.060" thick)	
NBS Smoke Density (flaming)	ASTM F814/E662	Passed	
NBS Smoke Density (non-flaming)	ASTM F814/E662	Passed	
System Availability	Layer Thickness Capability	Support Structure	Available Colors
Fortus 400mc™	0.013 inch (0.330 mm) <sup>5</sup>	Breakaway	■ Tan (Natural)
Fortus 450mc™	0.010 inch (0.254 mm)		■ Black
Fortus 900mc™			

The performance characteristics of these materials may vary according to application, operating conditions, or end use. Each user is responsible for determining that the Stratasy material is safe, lawful, and technically suitable for the intended application, as well as for identifying the proper disposal (or recycling) method consistent with applicable environmental laws and regulations. Stratasy makes no warranties of any kind, express or implied, including, but not limited to, the warranties of merchantability, fitness for a particular use, or warranty against patent infringement.

The information presented in this document are typical values intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. End-use material performance can be impacted (+/-) by, but not limited to, part design, end-use conditions, test conditions, color, etc. Actual values will vary with build conditions. Tested parts were built on Fortus 400mc @ 0.010" (0.254 mm) slice. Product specifications are subject to change without notice.

<sup>1</sup>Build orientation is on side long edge.

<sup>2</sup>Literature value unless otherwise noted.

<sup>3</sup>Due to amorphous nature, material does not display a melting point.

<sup>4</sup>All Electrical Property values were generated from the average of test plaques built with default part density (solid). Test plaques were 4.0 x 4.0 x 0.1 inches (102 x 102 x 2.5 mm) and were built both in the flat and vertical orientation. The range of values is mostly the result of the difference in properties of test plaques built in the flat vs. vertical orientation.

<sup>5</sup>0.013 inch (0.300 mm) layer thickness not available on either the Fortus 400mc or Fortus 450mc.

**Stratasy | [www.stratasy.com](http://www.stratasy.com) | [info@stratasy.com](mailto:info@stratasy.com)**

7665 Commerce Way  
Eden Prairie, MN 55344  
+1 888 480-3548 (US Toll Free)  
+1 952 937-3000 (Intl)  
+1 952 937-0070 (Fax)

2 Holtzman St.  
Science Park, PO Box 2496  
Rehovot 76124, Israel  
+972 74 745-4000  
+972 74 745-5000 (Fax)

©2014, 2013 Stratasy Inc. All rights reserved. Stratasy, FDM, Fortus and Finishing Touch are registered trademarks of Stratasy Inc. FDM Technology, Fused Deposition Modeling, Fortus 200mc, Fortus 250mc, Fortus 360mc, Fortus 380mc, Fortus 400mc, Fortus 450mc, Fortus 900mc, Insight, Control Center, Smart Supports, SR-30, SR-100, ABSplus, ABS-ESD7, and TouchWorks are trademarks of Stratasy, Inc. ULTEM is a trademark of SABIC Innovative Plastics IP BV. All other trademarks are the property of their respective owners, and Stratasy assumes no responsibility with regard to the selection, performance, or use of these non-Stratasy products. Product specifications subject to change without notice. Printed in the USA. FortusUltem9085MaterialSpecSheet-US-09-14

## At the core: Advanced FDM Technology

Fortus systems are based on Stratasy® FDM® (fused deposition modeling) technology. FDM is the industry's leading additive manufacturing technology, and the only one that uses production-grade thermoplastics, enabling the most durable parts.

Fortus systems use a wide range of thermoplastics with advanced mechanical properties so your parts can endure high heat, caustic chemicals, sterilization and high-impact applications.

## No special facilities needed

You can install a Fortus 3D Production System just about anywhere. No special venting is required because Fortus systems don't produce noxious fumes, chemicals or waste.

## No special skills needed

Fortus 3D Production Systems are easy to operate and maintain compared to other additive fabrication systems because there are no messy powders to handle and contain. They're so simple, an operator can be trained to operate a Fortus system in less than 30 minutes.

## Get your benchmark on the future of manufacturing

Fine details. Smooth surface finishes. Accuracy. Strength. The best way to see the advantages of a Fortus 3D Production System is to have your own part built on a Fortus system. Get your free part at: [stratasy.com](http://stratasy.com).